



PROFILES

TRADITIONAL SOLID SOFFIT PANELS 3/8"

4" - 12' & 20'

6" - 12', 16', 20' & 30'

*CUSTOM LENGTHS AVAILABLE FOR 6" SOFFIT

TRADITIONAL VENTED SOFFIT PANELS 3/8"

4" - 12' & 20'

6" - 12', 16' & 20'

**One panel can create a U-Channel or V-Groove profile.

SOFFIT TRIMS (3/8")

2PC OUTSIDE CORNER (1.5", 2") TRIM, 1PC INSIDE CORNER TRIM 4", 1PC J-TRIM (1.5", 2"), 2PC H-TRIM 2", 1PC MULTI TRIM 1", STARTER STRIP

FINISHES

WOODGRAINS, SOLIDS, ANODIZED, METALLICS

& INTERIOR FINISHES


NON STOCK COLOURS AVAILABLE (ADDITIONAL LEAD TIMES)

LEAD TIMES


1-2 WEEKS FOR STOCK COLORS + SHIPPING

2-3 WEEKS FOR NON-STOCK COLORS + SHIPPING

4" or 6" Traditional Solid Soffit Panel 3/8"

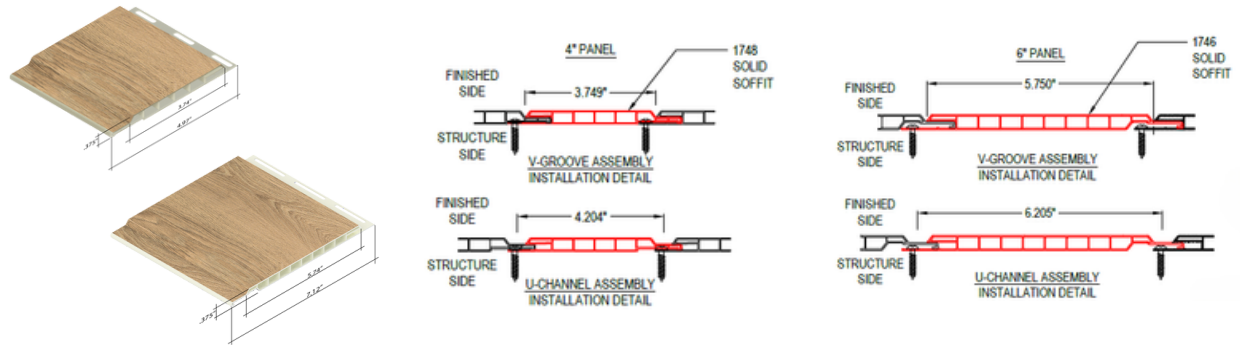

4" or 6" Traditional Vented Soffit Panel 3/8"

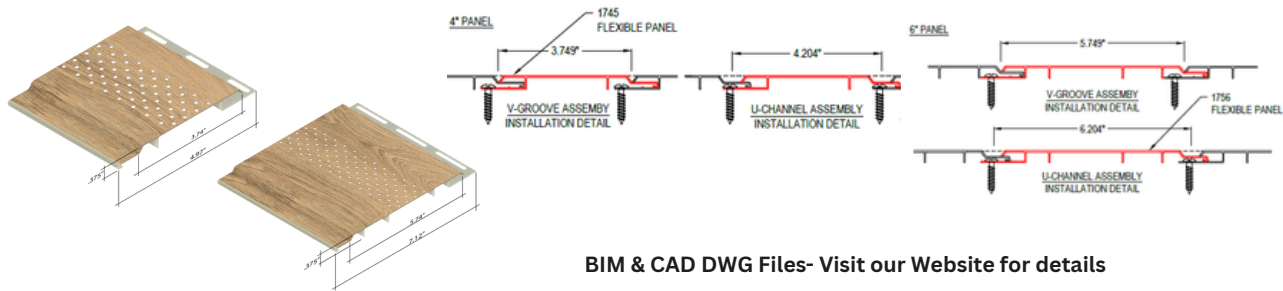

BIM & CAD DWG Files- Visit our Website for details

TESTS , EVALUATIONS & CERTIFICATES

CAN/CGSB 41.24-95

ASTM D635-18, Standard Test Method for Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position.

ASTM G154- 16, Standard Practice for Operating Fluorescent Ultraviolet (UV) Lamp Apparatus for Exposure of Nonmetallic Materials.

ASTM G155-21, Standard Practice for Operating Xenon Arc Lamp Apparatus for Exposure of Materials.

Fire Rating:



CAN/ULC S 102-2018, Standard Method of Test for Surface Burning Characteristics of Building Materials & Assemblies
CAN/ULC S 102.2-2018 Standard Method of Test for Surface Burning Characteristics of Flooring, Floor Coverings, and Misc. Material & Assemblies.



ASTM D3679-17, Standard Specification for Rigid PVC Siding.

ASTM D635-18, Standard Test Method for Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position.

ASTM E119-22, Standard Test Methods for Fire Tests of Building Construction and Materials.

ASTM G154- 16, Standard Practice for Operating Fluorescent Ultraviolet (UV) Lamp Apparatus for Exposure of Nonmetallic Materials.

American Architectural Manufacturers Association (AAMA):

AAMA 303-19 Voluntary Specification for Rigid Polyvinyl Chloride (PVC) Exterior Profiles.

AAMA 307-16 Voluntary Specification for Laminates Intended for Use on AAMA Certified Profiles.

AAMA 664-21 Voluntary Specification for In-Process Quality Control Requirements for Applicators of Synthetic Interior & Exterior Laminates.



UL 723 (ASTM E84)- Fire Rating (Class A)

Verified Product Declarations



Health (HPD)* and



Environmental (EPD)

THE NORTH AMERICAN EPD® SYSTEM

*The HPD for this product has been verified under HPD Open Standard version 2.
by an Approved Verifier under the HPDC Third Party Verification Program.

