



PROFILES

EXTERIOR SHADOWLINE WALL PANEL 1/2"

- 6" - 12', 16', 20' & 30'
- 6" - 2 x 3" REVEAL - 12', 16' & 20'
- 12" - 6 x 2" REVEAL - 12' & 16'
- 12" SHADOWLINE SEAMLESS - 12' & 16'

Please Note: if you are using our Shadowline panels for soffit, ventilation is supplied by others.

**CUSTOM SIZES AVAILABLE

EXTERIOR TRIMS (1/2" PANELS)

- 2PC OUTSIDE CORNER (2" & 3.5"), 2PC J- TRIM (2" & 3.5")
- 2PC H-TRIM (2.75"), 1PC INSIDE CORNER (4"), ALUMINIUM
- STARTER STRIP (1/2")
- 2" BATTEN - installed w/ 12" Shadowline Seamless Wall Panel 1/2"


FINISHES

- WOODGRAINS, SOLIDS, ANODIZED, METALLICS
- & INTERIOR FINISHES
- NON STOCK COLOURS AVAILABLE (ADDITIONAL LEAD TIMES)


LEAD TIMES

- 1-2 WEEKS FOR STOCK COLORS + SHIPPING
- 2-3 WEEKS FOR NON-STOCK COLORS + SHIPPING


12" Shadowline Panel with 2" Reveal 1/2"

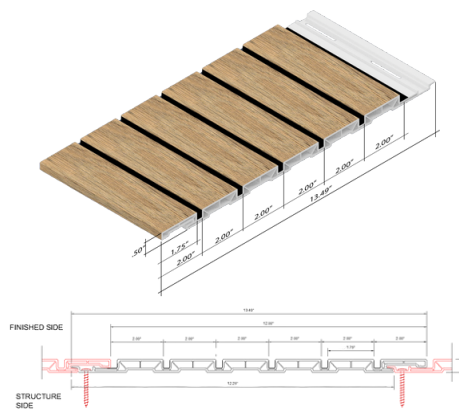


6" Shadowline Wall Panel 1/2"

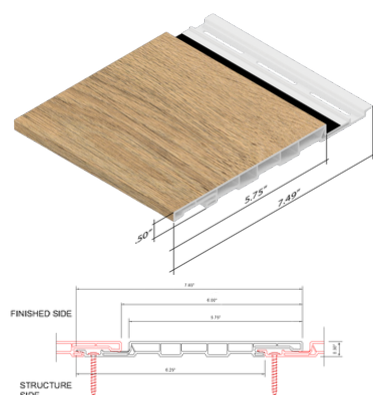

6" Shadowline Panel Wall with 3" Reveal 1/2"

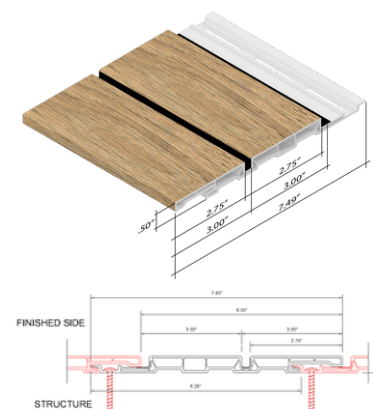

12" Shadowline Seamless Wall Panel 1/2"

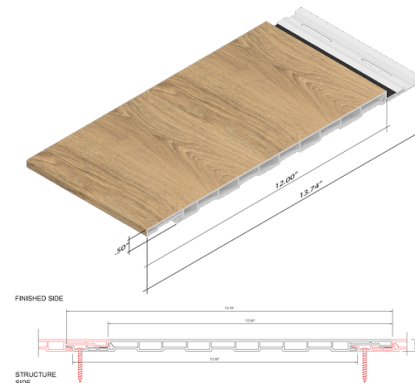

BIM & CAD DWG Files- Visit our Website for details

TESTS , EVALUATIONS & CERTIFICATES



CCMC EVALUATION 14323-R Criteria: CCMC-TG-074633.07-15, "CCMC Technical Guide for Heavy Gage PVC Siding"
CAN/CGSB 41.24-95



ASTM D635-18, Standard Test Method for Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position.



ASTM E 119- 2 Hr. Heat and Flame Resistance

Fire Rating: CAN/ULC S 134 - Standard Method of Fire Test of Exterior Wall Assemblies

Wind Load: ASTM E 330 Procedure B: Passed 4000 PA (183 MPH)



Florida Product Code: 45923 (CLADDING) - 6" ONLY

Florida Product Code: 46611 (SOFFIT) - 6" ONLY

TDI (Texas Department of Insurance)- Evaluation ID: EC-149

WUI (The Wildland - Urban Interface) - California Dept. of Forestry & Fire Protection Listing No.8140-2381:0001





UL 723 (ASTM E84)-Fire Rating (Class A)

NFPA 285 -Standard Fire Test Method for Evaluation of Fire Propagation Characteristics of Exterior Wall Assemblies

NFPA 268 Standard Test Method for Determining Ignitability of Exterior Wall Assemblies

Wind Load: ASTM E 330 Procedure B: Passed 4000 PA (183 MPH)



Verified Product Declarations  Health (HPD)* and  Environmental (EPD)

THE NORTH AMERICAN EPD® SYSTEM

*The HPD for this product has been verified under HPD Open Standard version 2.
by an Approved Verifier under the HPDC Third Party Verification Program.

