



PROFILES

QUICK CLICK SHADOWLINE SOFFIT PANEL 1/2"

6" - 12', 16', 20' & 30'

QUICK CLICK SOFFIT TRIMS



2 PC ALUMINUM J-TRIM 2" - (12' & 20') - STAND. BLACK FINISH
QUICK CLICK ALUMINUM TRACK CONNECTOR
QUICK CLICK ALUMINUM TRACK (12' LENGTHS)

FINISHES

WOODGRAINS, SOLIDS, ANODIZED, METALLICS
& INTERIOR FINISHES
NON STOCK COLOURS AVAILABLE (ADDITIONAL LEAD TIMES)

LEAD TIMES

1-2 WEEKS FOR STOCK COLORS + SHIPPING
2-3 WEEKS FOR NON-STOCK COLORS + SHIPPING

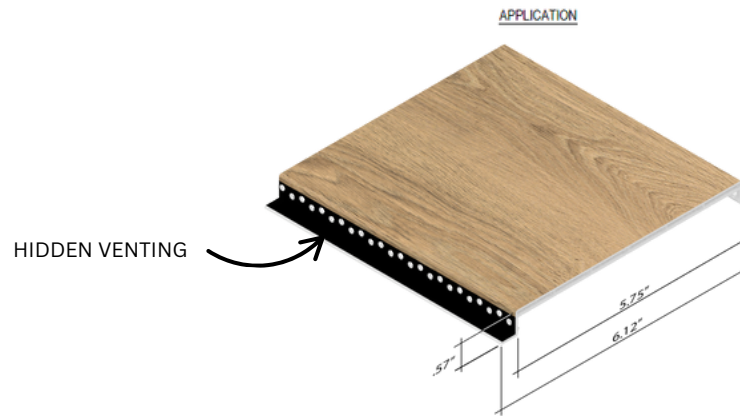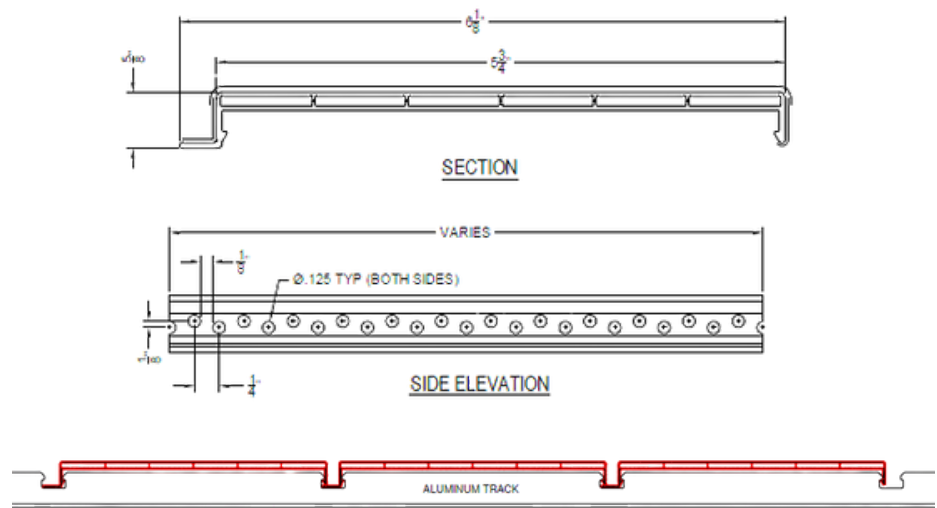

BIM & CAD DWG Files- Visit our Website for details

**BEST OF IBS™
AWARDS 2024
WINNER
BEST OUTDOOR
PRODUCT**



TESTS , EVALUATIONS & CERTIFICATES



American Architectural Manufacturers Association (AAMA):

AAMA 303-19 Voluntary Specification for Rigid Polyvinyl Chloride (PVC) Exterior Profiles.



AAMA 307-16 Voluntary Specification for Laminates Intended for Use on AAMA Certified Profiles.

AAMA 664-21 Voluntary Specification for In-Process Quality Control Requirements for Applicators of Synthetic Interior & Exterior Laminates.

ASTM G154- 16, Standard Practice for Operating Fluorescent Ultraviolet (UV) Lamp Apparatus for Exposure of Nonmetallic Materials.

ASTM G155-21, Standard Practice for Operating Xenon Arc Lamp Apparatus for Exposure of Materials.

RILEM TC 127 MS B5- Determination of the damage caused by acid rain.



Wind Load: ASTM E 330 Procedure B: 95 MPH @ 24" O.C

Verified Product Declarations



Health (HPD)* and



Environmental (EPD)

THE NORTH AMERICAN EPD® SYSTEM

*The HPD for this product has been verified under HPD Open Standard version 2.
by an Approved Verifier under the HPDC Third Party Verification Program.

