

Installation Manual

Interior Walls & Ceilings



CHAMCLAD®
TRANSFORMING SPACES

Revised: June 15, 2026
Supersedes August 22, 2025



Scan for Installation videos

Table of Contents

1.0 PURPOSE & SCOPE	3
2.0 ADDITIONAL DOCUMENTS (REQUIRED)	3
3.0 GENERAL INFORMATION & ADVISORY	3
3.1 Installer's Responsibilities.....	3
3.2 Material Inspection.....	3
3.3 Handling.....	3
3.4 Storage.....	3
3.5 Safety Requirements	4
4.0 TOOLS & FASTENERS	4
4.1 Tools Required	4
4.2 Fasteners Summary	4
5.0 INSTALLATION FUNDAMENTALS.....	4
5.1 Expansion & Contraction General Rules.....	4
5.2 Cavity & Substructure Requirements	5
5.3 Flashings & Penetrations	5
5.4 Panel Trims and Notes.....	5
6.0 CARE & MAINTENANCE.....	5
CHAMCLAD® INTERIOR WALL & CEILINGS.....	6
6.0 INTERIOR WALL AND CEILING.....	7
6.1 PRODUCTS- 4", 6" & 12" Interior Wall and Ceiling Panels 3/8"	7
6.2 Interior Wall and Ceiling Trims	7
7.0 INSTALLATION.....	8
7.1 General Information	8
7.2 Horizontal Interior Installation	8
7.3 Vertical Interior Installation.....	9
7.4 Interior Ceiling Installation	9
8.0 ASSEMBLY DRAWINGS.....	10
8.1 WS-03 Wall Floor Detail.....	10
WS-05 Wall Head Detail.....	11
WS-13 – Interior Wall & Ceiling Detail.....	12
APPENDIX A – GENERAL INFORMATION & ADVISORY	13
APPENDIX B- FASTENER AND TOOL GUIDE.....	15
APPENDIX C– TECHNICAL EXPANSION & CONTRACTION REFERENCE.....	18
APPENDIX D - CARE AND MAINTENANCE.....	19

1.0 PURPOSE & SCOPE

This Installation Manual provides installers and designers with the essential requirements for proper installation of ChamClad® products. These instructions reflect Best Practices and must be followed to maintain product performance and warranty compliance. For additional advisory information and expanded technical guidance, you must read the ChamClad® Appendices that accompany this manual.

2.0 ADDITIONAL DOCUMENTS (REQUIRED)

This manual is accompanied by the following appendices located at the end of the manual and which must be reviewed prior to installation:

- 🕒 *Appendix A: General Information & Advisory*
- 🕒 *Appendix B: Tools and Fastener Guide*
- 🕒 *Appendix C: Technical Expansion & Contraction Reference*
- 🕒 *Appendix D: Care & Maintenance Guide*

These documents provide additional product knowledge, environmental behavior guidelines, compliance references, and long-term maintenance details.

3.0 GENERAL INFORMATION & ADVISORY

- 🕒 For additional information, refer to *Appendix A: General Information & Advisory*

3.1 Installer's Responsibilities

- 🕒 **Read this manual completely before starting installation.** Improper installation may void the warranty.
- 🕒 Always ensure you are using the **most current version** of this manual. Updated manuals, appendices and technical bulletins are available at ChamClad.com.
- 🕒 It is the responsibility of the installer to observe the requirements of the local Building Code as they relate to installation in any given area.

3.2 Material Inspection

- 🕒 Inspect all ChamClad® boards, trims, and accessories for damage, colour discrepancies, or defects prior to installation.
- 🕒 If there are any concerns about material **do not** install. Report issues within 7 days of receipt to info@chamclad.com.

3.3 Handling

- 🕒 Always carry boards on their narrow edge and support full length.
- 🕒 Whenever possible avoid using metal banding. Metal banding will cut into the boards if pulled too tight.

3.4 Storage

- 🕒 Store materials on a flat, fully supported surface.

Installation Manual – Interior Wall and Ceiling

- ⦿ Keep products protected from direct sunlight and excessive heat. Note: It is important that product is not stored for long periods where temperatures could exceed 30 degrees Celsius (86 degrees Fahrenheit).
- ⦿ Do not store on asphalt surfaces.

3.5 Safety Requirements

- ⦿ Proper PPE is mandatory: eye protection, gloves, hearing protection when cutting.
- ⦿ When using a circular saw: cut face down.
- ⦿ When using a cut-off saw: cut face up.
- ⦿ Use carbide-tipped blades with 84+ teeth.
- ⦿ Do not score or snap ChamClad® panels.

4.0 TOOLS & FASTENERS

- ⦿ For additional information, refer to *Appendix B: Tools and Fastener Guide*

4.1 Tools Required

- ⦿ Circular saw / cut-off saw
- ⦿ Level, tape measure, chalk line
- ⦿ Drill/driver with appropriate bits
- ⦿ Non-marking rubber mallet

4.2 Fasteners Summary

- ⦿ Use ChamClad® universal self-tapping screws where possible.
- ⦿ Minimum fastener penetration: 1¼" (32mm) into structural substrate.
- ⦿ When fastening into metal, pre-drill if using universal screws.
- ⦿ Leave a 1/32" (0.8mm) gap between fastener head and nail flange.
- ⦿ Do NOT use: nail guns, staplers, glue.

5.0 INSTALLATION FUNDAMENTALS

- ⦿ For additional information, refer to *Appendix C: Technical Expansion & Contraction Reference*

5.1 Expansion & Contraction General Rules

- ⦿ Installation in weather colder than -10°C (14°F) is not recommended due to potential chipping or cracking of the panels. Should that occur warranty may be voided.
- ⦿ **It is important to acclimate panels and accessories for a minimum of 24 hours prior to installation.**
- ⦿ Always allow for movement by installing fasteners at the center of nail slots.
- ⦿ The following are Rules of Thumb for expansion and contraction.

Rule of Thumb – Gap Allowance ($\Delta T = 60^{\circ}\text{C} / 108^{\circ}\text{F}$)

These values are intentionally conservative. For minimum calculated gap requirements based on actual panel length and temperature change, refer to the *Gap Reference Chart in Appendix C*. Based on a net temperature change of 60°C (108°F) (for example: installation at 0°C (32°F) with service temperatures reaching 60°C (140°F)), the following general guidelines may be used:

- ⊗ Panels up to 12 ft (3.7 m): min. gap of 5/16" (8 mm) per side
- ⊗ Panels over 12 ft up to 16 ft (4.9 m) max: Leave a min. gap of 1/2" (13 mm) per side
- ⊗ Panels over 16 ft up to 24 ft (7.3 m) max: Leave a min. gap of 5/8" (16 mm) per side
- ⊗ Panels 25 ft (7.6 m) and longer: Panels must be pinned at the midpoint by fastening directly through the nail rail (not the slot center). To determine the required end gap, use the distance from the pinned midpoint to the panel end (half the total panel length) and refer to the Rules of Thumb above or *Gap Reference Chart in Appendix C*.
- ⊗ Where required gaps are 5/8" (16 mm) or greater: The use of larger-faced trims is recommended to accommodate expansion and contraction, including 3.5" 2-pc Finish Trim, 3.5" 2-pc Outside Corner, or larger-faced H-Trim.

5.2 Cavity & Substructure Requirements

- ⊗ ChamClad® exterior wall panels should be installed over a vented wall cavity assembly with furring strips/ strapping, galvanized steel Z-girts (min. 20 ga.), or a continuous 3-dimensional membrane, in accordance with local Building Code requirements. To ensure proper installation and meet warranty requirements, refer to CCMC/ICCES evaluations for assembly requirements.
- ⊗ When installing over rigid insulation, fasteners must penetrate through to the structural substrate.

5.3 Flashings & Penetrations

- ⊗ Follow local codes for window, door, and penetration flashing.
- ⊗ When using sealant, ChamClad® recommends LePage Quadmax or equivalent to ASTM 920.

5.4 Panel Trims and Notes

- ⊗ ChamClad® patterns repeat approximately every 48" (1.2m). Mix boards to avoid pattern repetition.
- ⊗ Classic tongue-and-groove system with product stacking from bottom.
- ⊗ For a U-Channel profile, insert to the first stop. For a V-Groove profile tap to the next stop.

6.0 CARE & MAINTENANCE

- ⊗ For full maintenance guidelines, refer to *Appendix D: Care & Maintenance Guide*
- ⊗ Clean every 12–18 months (or 8–12 months in high exposure areas).
- ⊗ Use mild detergent with soft cloth or brush.
- ⊗ Maximum pressure wash: 1500 PSI.
- ⊗ Do not use solvents or abrasive cleaners.

If you require further guidance or project-specific recommendations, contact

engineering@chamclad.com



12" Seamless Interior Wall and Ceiling Panel &
12" Shadowline Panel with 2" Reveal Black Sand

CHAMCLAD® INTERIOR

WALL, CEILINGS, HORIZONTAL, VERTICAL



12" Seamless Interior Wall and Ceiling Panel Toffee

6.0 INTERIOR WALL AND CEILING

6.1 PRODUCTS- 4", 6" & 12" Interior Wall and Ceiling Panels 3/8"



4" Interior Wall & Ceiling Panels
12' & 20' Lengths
100mm x 10mm



6" Interior Wall & Ceiling Panels
12', 16' & 20' Lengths
150mm x 10mm



12" Interior Wall & Ceiling
Panels Seamless Panel
12' & 20' Lengths
300mm x 10mm

NOTE: 4" & 6" panels available in V-Groove and U-Channel profiles
6" Classic and Shadowline may be used in interior wall and ceiling applications

6.2 Interior Wall and Ceiling Trims



1PC Soffit/ Interior Inside Corner
Trim 4" (PVC)
10', 12', & 20'



*2PC Soffit/ Interior
Outside Corner Trim 1.5"
12' & 20'




*2PC Soffit/ Interior
J-Trim 1.5"
12' & 20'



1PC Soffit/ Interior J-Trim 1.5"
12' & 20'



*2PC Soffit/ Interior H-Trim 2"
12' & 20'



*PVC Starter Strip 3/8"
12', 16' & 20'

*THESE TRIMS ARE AVAILABLE IN ALL ALUMINUM OR HYBRID COMBINATIONS FOR COMMERCIAL APPLICATIONS

Metric Conversion Chart

Feet	Meters
10'	3m
12'	3.6m
16'	4.9m
20'	6.1m

Inches	Millimeters
1.5"	38mm
2"	50mm
2.75"	70mm

7.0 INSTALLATION

7.1 General Information

- ⊗ Always allow ChamClad® panels and accessories to acclimatize to current temperature conditions before starting the installation. Temperature variations are less on an interior installation.
- ⊗ Verify that the walls and ceiling substrates are even and level across all surfaces. Furring may be required to acquire a consistent surface to attach ChamClad® panels.
- ⊗ **Our 4", 6", and 12" interior wall and ceiling 3/8" panels should be used for soffit applications, interior covered deck areas, barrel ceilings, sun porches, interior walls, and ceilings. The use of these panels on an exterior WALL will void the warranty.**

7.2 Horizontal Interior Installation

Refer to drawings WS-10A & WS-10B

- ⊗ Interior wall and ceiling panels are installed similarly to exterior wall cladding. Refer to Exterior Cladding Installation Manual – Section 7.2 Horizontal Installation.
- ⊗ Establish a level guideline using a chalk line on all wall areas to be covered with interior wall and ceiling panels, where the bottom of the lowest panel is to be installed. Depending on the look or finish that is desired, the installer may use a PVC starter strip or a J-Trim. Since this is an interior wall, no drain holes need be drilled into the bottom of the J-Trim.
- ⊗ Install 1PC J-Trim or 2PC J-Trim in areas where panels meet other finishes. 1PC J-Trim or 2PC J-Trim can be used at windows, doors, and other penetrations. Fasten interior wall panels at **16" O.C.** After a few courses of wall panels, the installer should check for horizontal alignment and level.
- ⊗ **If 2PC trims are used, install all J-Trim bases first, and once wall panels are installed to the top course, finish off by installing the J-Trim top caps.**
- ⊗ **When butt joint is required at interior wall and ceiling panels, use 2PC H-Trim to connect panels.**
- ⊗ On Interior applications, fasten trims 12-16" O.C. and panels 16" O.C. using ChamClad® universal fasteners. Panels must be attached to structural framing members.

7.3 Vertical Interior Installation

Refer to drawings WS-10A & WS-10B

- ④ Interior wall and ceiling panels (Vertical Installation) are installed similarly to Exterior Wall Cladding. Refer to Exterior Cladding Installation Manual – Section 7.3 Vertical Installation.
- ④ Establish a level guideline using a chalk line on all wall areas to be covered with interior wall and ceiling panels, where the bottom of the lowest panel is to be installed. As in the Exterior Vertical Installation, use a J-Trim to start application. As this is an interior wall, no drain holes are required to be drilled into the bottom of the J- Trim.
- ④ Install 1PC J-Trim or 2PC J-Trim in areas where panels meet other finishes. 1PC J-Trim or 2PC J-Trim can be used at windows, doors, and other penetrations. Fasten interior wall panels at 16" O.C. ChamClad® panels and check for alignment after first few courses are installed.
- ④ If 2PC trims are used, install all J-Trim bases first, and once wall panels are installed, finish off by installing the J-Trim top caps.
- ④ When butt joint is required at interior wall and ceiling panels, use 2PC H-Trim to connect panels.
- ④ On Interior applications, fasten trims 12-16" O.C. and panels 16" O.C. using ChamClad® universal fasteners. Panels must be attached to structural framing members.


7.4 Interior Ceiling Installation

Refer to drawing WS-13


- ④ Interior wall and ceiling panels are installed similarly to Traditional Exterior Soffits. Refer to Soffits Installation Manual – Section 8.0 Installation .
- ④ If required to level, install furring strips at 12-16" O.C. perpendicular to the joist.
- ④ We recommend all ChamClad® accessories be fastened every 12-16" O.C.
- ④ Fasten at each furring strip, which should be 12-16" O.C. Once you have installed a few courses of ChamClad® ceiling panels, check for alignment of the perpendicular or parallel adjacent vertical wall. Where you are butt joining panels, use H-Trim to finish the joint.
- ④ Install the remaining ChamClad® panels and check for alignment. When using the 2PC J-Trim install the top cap onto the base to complete the installation.

8.0 ASSEMBLY DRAWINGS


8.1 WS-03 Wall Floor Detail

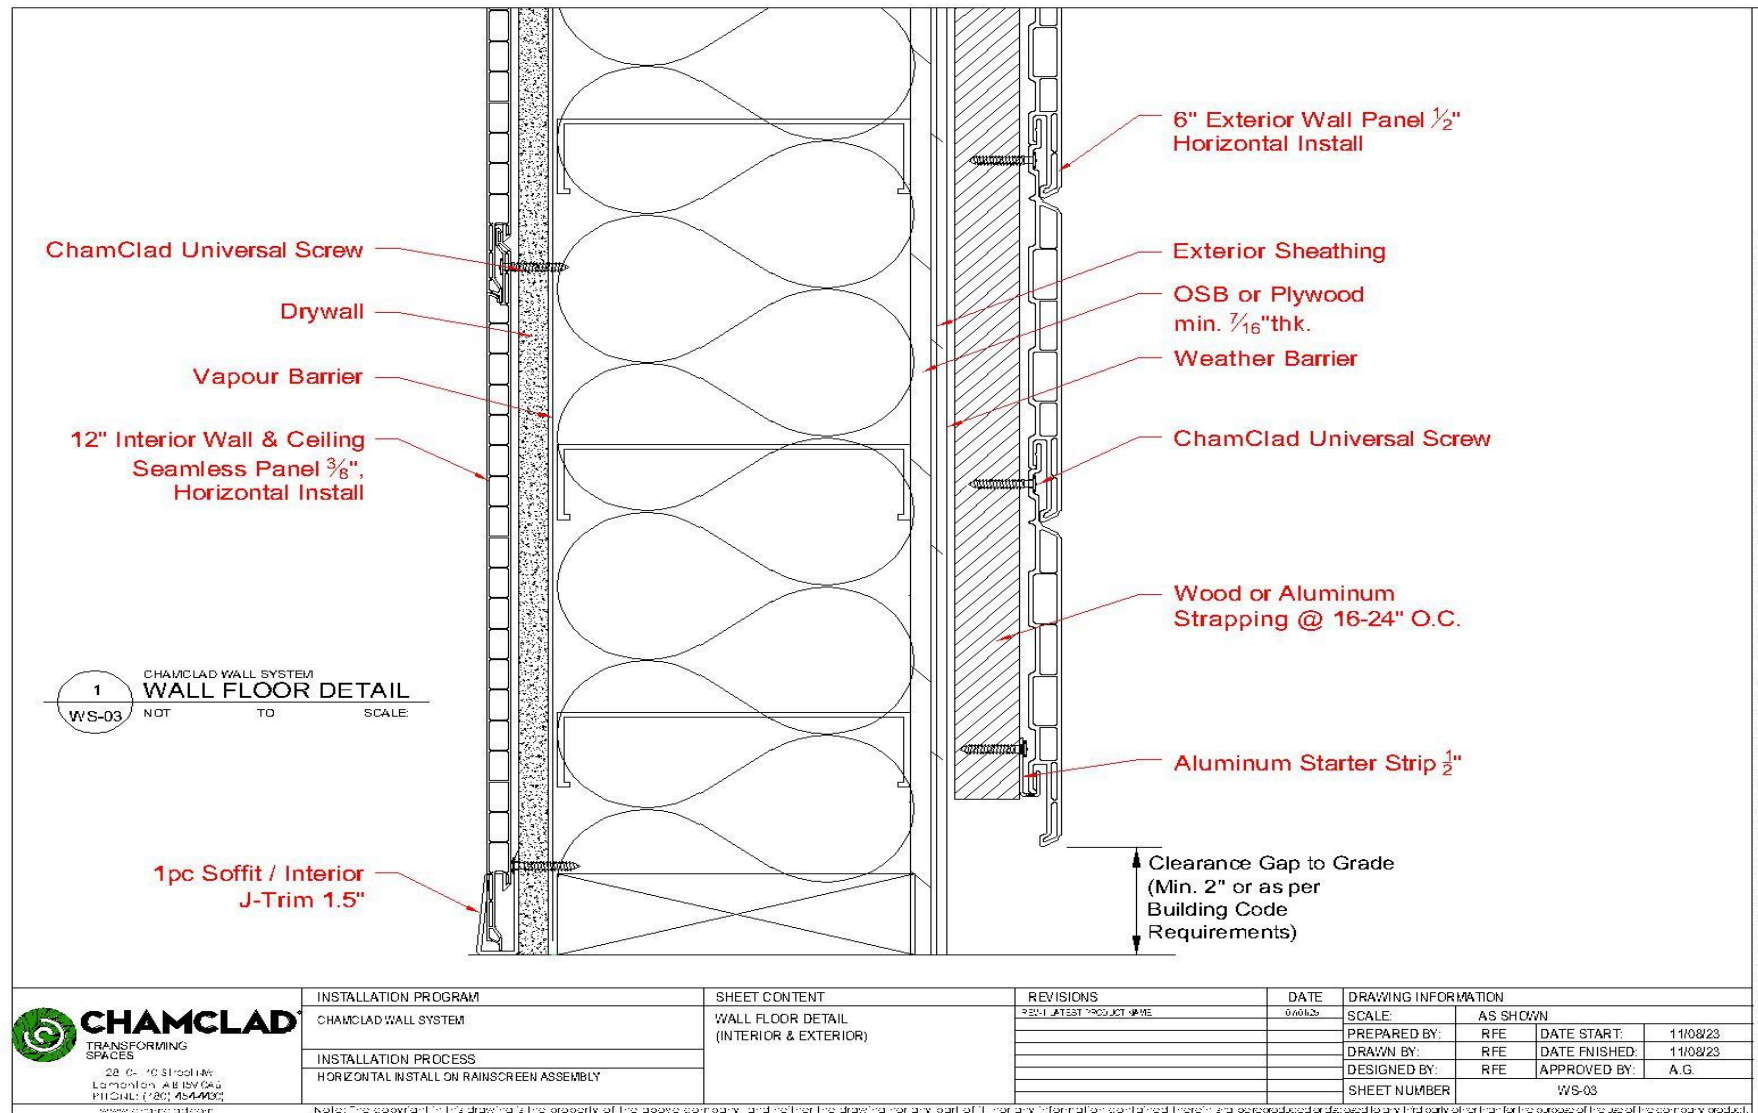

WS-05 Wall Head Detail

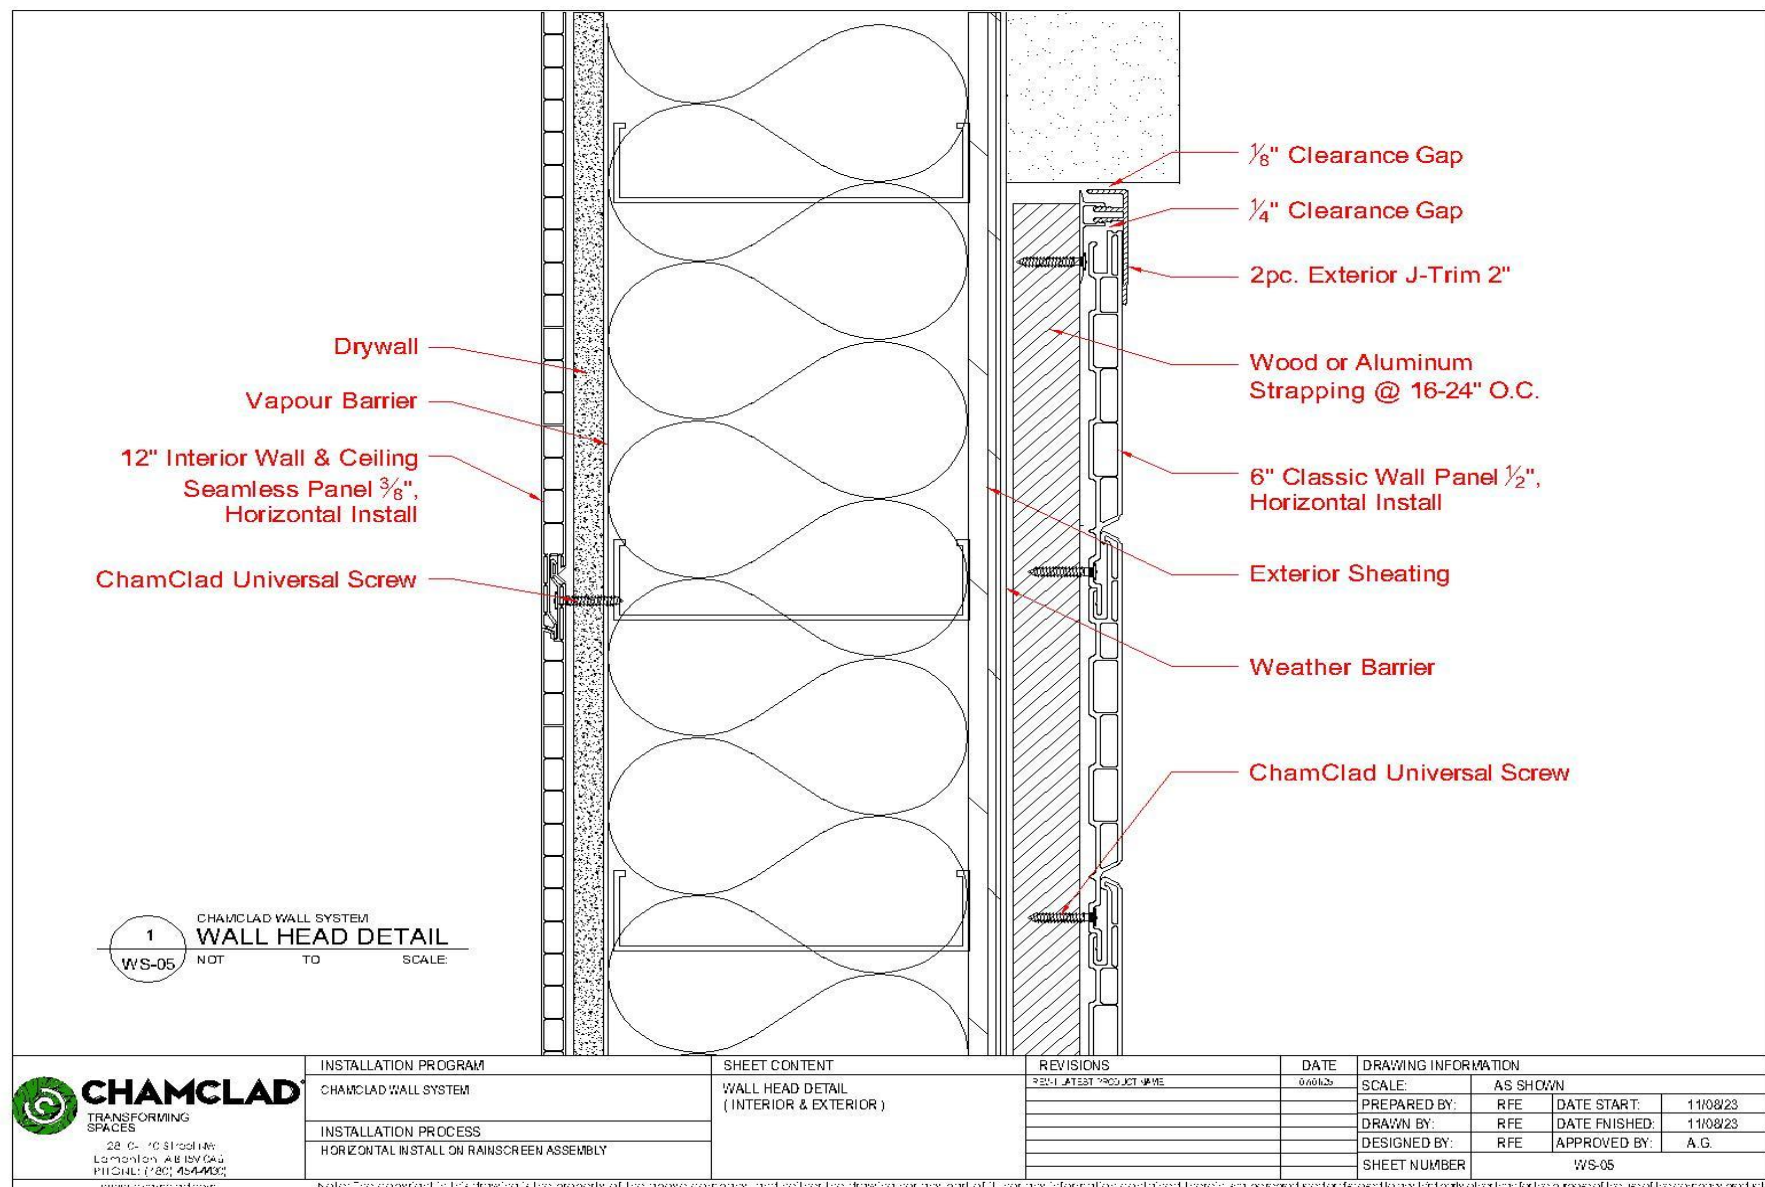

WS-13 – Interior Wall & Ceiling Detail

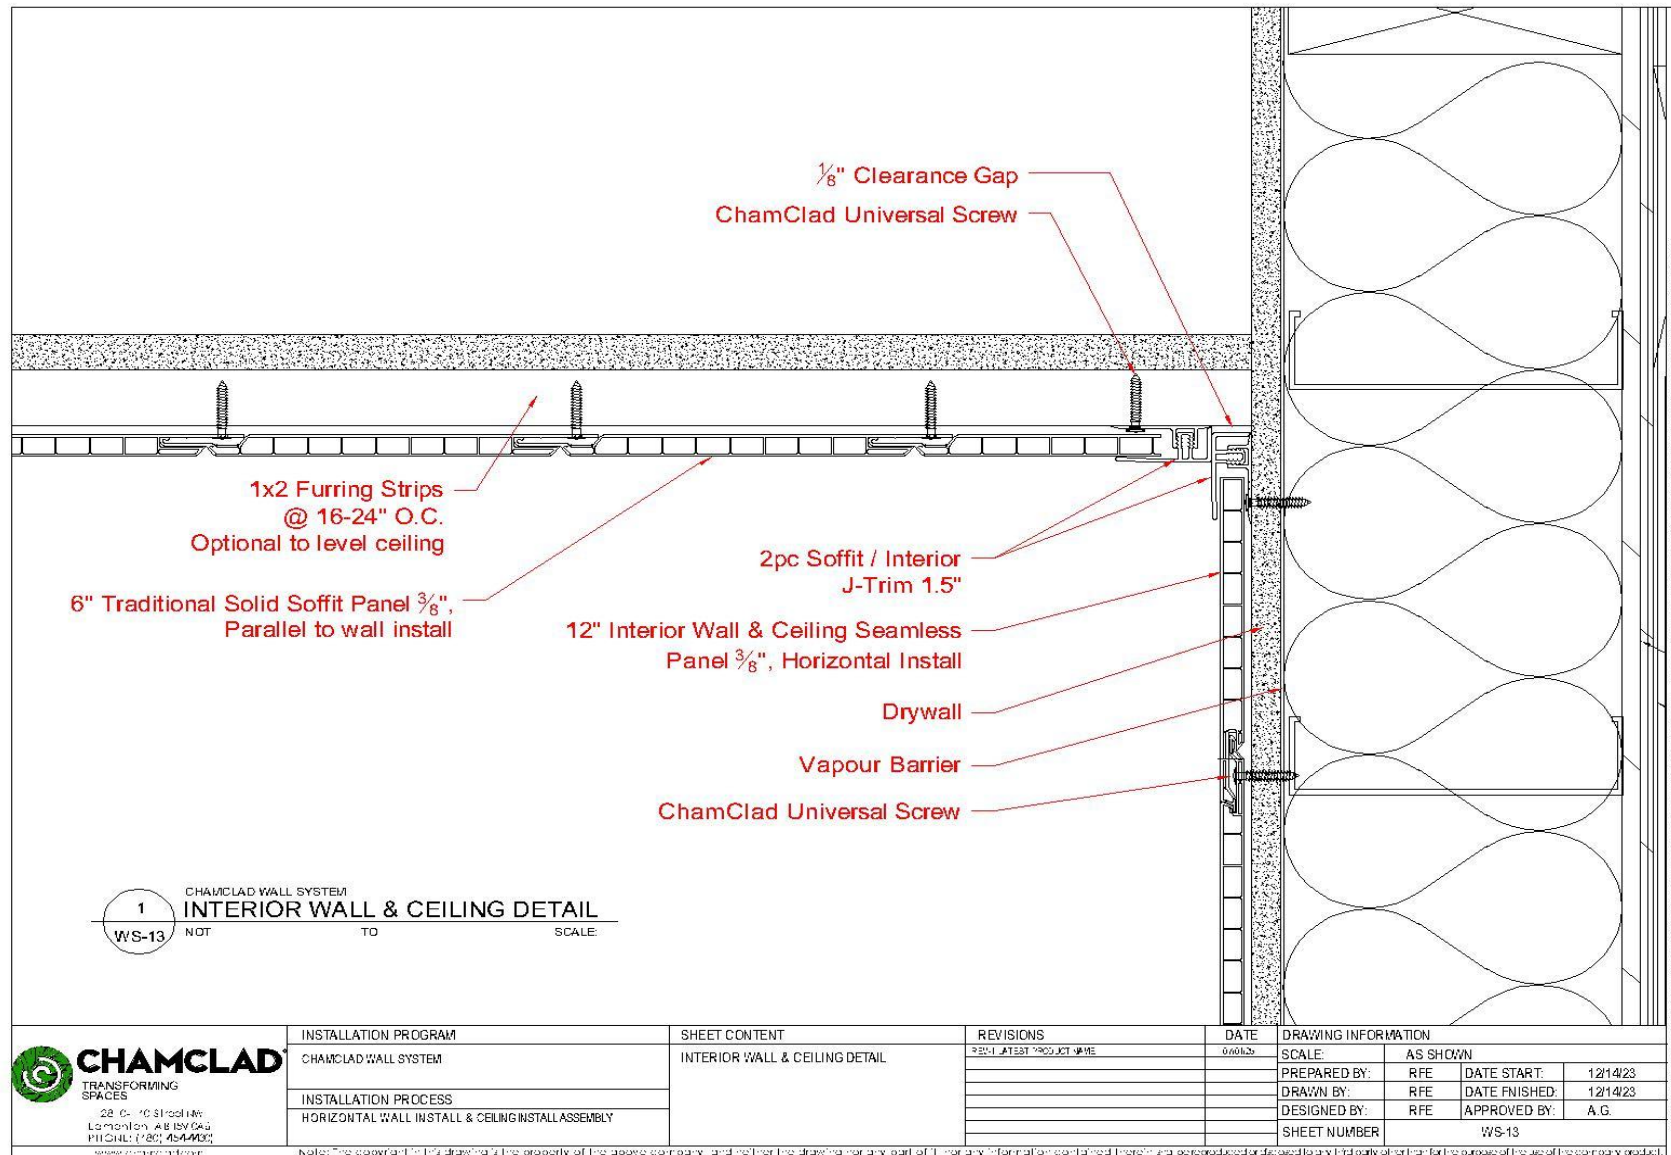

APPENDIX A – GENERAL INFORMATION & ADVISORY

This bulletin provides non-procedural information that supports—but does not replace—the Installation Manual. It covers certifications, product behavior notes, storage compatibility, and code responsibilities.

Certifications

Certification scope, test standards, and applicability vary by profile and application. Always verify current evaluation reports and project-specific requirements.

Product Background & Manufacturing Notes

- ⑥ **Continuous improvement:** Our research and development team are committed to improving product durability and performance. As a result, documentation may change from time to time. Please check our website for the most recent documentation and bulletins.
- ⑥ **Minor manufacturing irregularities:** Occasionally, you may come across minor irregularities that happen naturally during the manufacturing process. This occurrence will not affect the aesthetics and performance of the product.
- ⑥ **Aluminum trim film shrink-back:** Periodically, you may encounter aluminum accessories where the ends need trimming due to the film shrinking back during the curing process. This occurrence will not affect the performance of the product.
- ⑥ **Pattern repeat:** ChamClad® wall panels are laminated with a repeating pattern (48" or 1.2m). ChamClad® makes every effort to ensure the patterns are mixed in each bag to minimize repeat patterns. It is suggested to randomly check panels at the job site for repeat patterns and adjust as required. To avoid excessive repetition when cutting boards 4' (1.2m) or less, use 2 boards with different patterns.
- ⑥ **Inspection of Materials:** Inspect all material for any breakage, defects, damage, and colour before installing. Do not install product that is questionable. Contact ChamClad® customer service or your dealer for assistance. Installing defective material may void your product Warranty.

Transportation, Proper Handling & Storage

- ⑥ When transporting ChamClad® products, keep bags flat. The boards must be supported along the full length. Whenever possible avoid using metal banding. Metal banding will cut into the boards if pulled too tight. Materials are required to be inspected for any damage within 7 days of receipt, recorded on the Bill of Lading, and forwarded to info@ChamClad.com. ChamClad® warranty may be voided if damaged product is installed without prior inspection.
- ⑥ Always carry ChamClad® cladding by holding it by the narrow edge and pick boards up in the center. ChamClad® pallets should not be stacked more than 2 pallets high and always stored on a flat surface.



- ⦿ Products must be on a flat surface which supports the entire length of the boards and should be kept dry and out of direct sunlight (when possible). Do not store or place on asphalt or in areas prone to excessive heat buildup. Cover with a tarp leaving ends open to allow for airflow. Store away from areas where there may be falling objects or construction debris that could cause damage. If stacking product, please ensure it is stable.
- ⦿ **ChamClad® packaging is vented to limit the greenhouse effect. Do NOT store uninstalled panels in areas of excessive heat prior to installation; doing so may lead to product distortion.**
- ⦿ Note: It is important that product is not stored for long periods where temperatures could exceed 30 degrees Celsius (86 degrees Fahrenheit).

Building Code Responsibilities

- ⦿ It is the responsibility of the installer to observe the requirements of the local Building Code as they relate to installation in any given area. Most Building Codes are derived from National Building Codes. In Canada, the primary model is the National Building Code (NBC), which is published by the National Research Council of Canada (www.nrc-cnrc.gc.ca). In the United States, the primary model is based on the International Building Code (IBC), which produces the International Residential Building Code (IRC).

Warranty & Documentation

- Read the **Installation Manual in full** before starting.
- Use the **latest** Manual and Bulletins from ChamClad.com.
- Materials are required to be inspected for any damage within 7 days of receipt, recorded on the Bill of Lading, and forwarded to info@ChamClad.com. ChamClad® warranty may be voided if damaged product is installed without prior inspection.
- Warranty documentation can be found on at Chamclad.com. [Technical Resources - ChamClad](#)

Contact

- **Technical/Engineering:** engineering@chamclad.com
- **Customer Service:** info@chamclad.com
- **Website:** <https://chamclad.com>
- **Warranty**
 - **Registration:** info@chamclad.com
 - **Claims:** claims@chamclad.com

This bulletin contains advisory content only. Follow the Installation Manual for step-by-step procedures and mandatory requirements.

APPENDIX B- FASTENER AND TOOL GUIDE

This appendix provides the technical and field guidance required for properly cutting and fastening ChamClad® panels. It is intended to be used with the Installation Manual.

Tools, Materials and Cutting

POWER TOOLS AND HAND TOOLS



- Ⓢ Always ensure you wear proper, appropriate and standard PPE when performing cutting and installation.
- Ⓢ If using a circular saw, cut cladding face down on a clean surface.
- Ⓢ If using a cut-off saw, cut face up
- Ⓢ Carbide-tipped blades with 84+ teeth are recommended. (Aluminum blades are optimal)
- Ⓢ Do not score or snap ChamClad® exterior cladding
- Ⓢ Do not cut ChamClad® with coarse saw blade to avoid chipping or damaging the panel

Fasteners




Fastener Size is critical to a successful ChamClad® installation. We recommend the following:

- Ⓢ Screws: It is strongly recommended to use ChamClad® universal self-tapping screws which are available from your local distributor or directly from ChamClad®.
- Ⓢ The fasteners must penetrate the wall to a minimum depth of 1 ¼" (32mm) and allow for the expansion and contraction of the ChamClad® products. If using metal furring strips, use of self-drilling screw is recommended (Modified truss quadrex coarse thread self-drilling screw #8-18 X 1 ½" (38mm)). You must pre-drill pilot holes when using ChamClad's universal self-tapping screws, when screwing into metal.
- Ⓢ If ChamClad® fasteners unavailable, use low profile, corrosion resistant or stainless-steel screws long enough to fasten through the pre-punched flange. Do not use electroplated fasteners. It is important that the fastener head can fit inside the nailing slot. Fastener heads that protrude outside of the nailing slot will hinder ChamClad® tongue and groove locking mechanism.
- Ⓢ When placing fasteners in the center of the designated nail slots, always leave a 1/32" (.8mm) gap between the fastener head and nail flange to allow ChamClad® panels expand/contract as needed.

Recommended Screw	
	#8-10 ChamClad Universal Self Tapping 1 ½" Screw #8 quad-drive 1 ½" (38mm)
	#8-10 ChamClad Universal Self Tapping 2 ¾" Screw #8 quad-drive 2 ¾" (70mm)
	#8- 18 ChamClad Universal Self Drilling 1 ½"
Examples of Alternate Screws:	
	Exterior Wall #8 1 ½" (38mm) 17 Self tapping Round Washer Lo-root
	Modified Truss Quadrex Coarse Thread Screw Self-Drilling #8 – 18 X 1 ½" (38mm)
Alternate Trim Fasteners	
	Flat Head Roofing Nail* 1 ¼" – 1 ½" *Prior to use, confirm that alternate fasteners are permitted by the applicable building code and approved by the local Authority Having Jurisdiction (AHJ).

Note: DO NOT USE a stapler, or nail gun for exterior cladding and soffit panel installation. GLUE IS NOT to be used to fasten strapping or ChamClad® exterior wall boards.

Proper Fastener and Installation

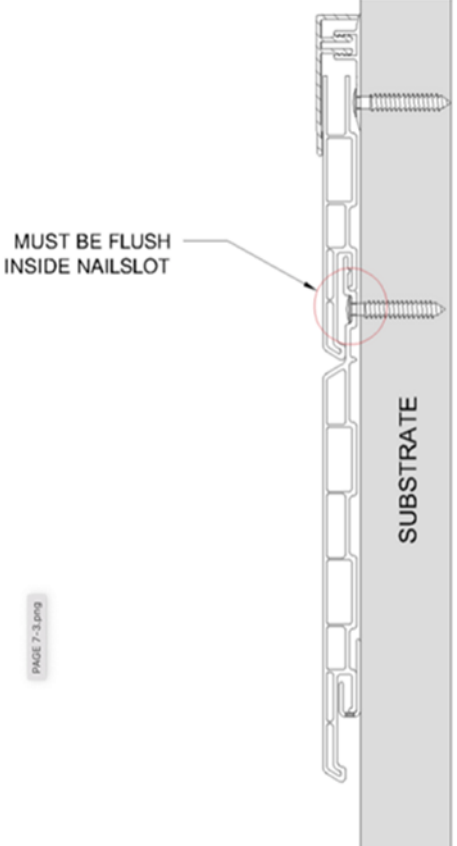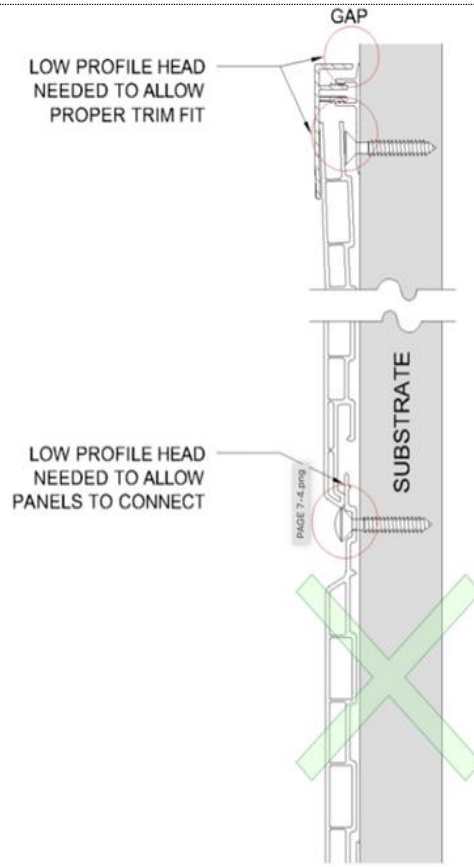PROPER FASTENERS / INSTALLATION	INCCORECT FASTENER / INSTALLATION
 RECOMMENDED LO-ROOT OR MODIFIED TRUSS HEAD NOTE: UNIVERSAL FASTENERS PROVIDED BY CHAMCLAD MAYBE PURCHASED AT YOUR LOCAL DISTRIBUTOR	 DO NOT USE PAN-HEAD OR LOW TRUSS
 MUST BE FLUSH INSIDE NAILSLLOT SUBSTRATE PAGE 7-3.png CORRECT INSTALL	 GAP LOW PROFILE HEAD NEEDED TO ALLOW PROPER TRIM FIT LOW PROFILE HEAD NEEDED TO ALLOW PANELS TO CONNECT PAGE 7-4.png SUBSTRATE INCORRECT INSTALL

APPENDIX C– TECHNICAL EXPANSION & CONTRACTION REFERENCE

This appendix provides the technical background and field guidance required to properly account for thermal movement in ChamClad® panels. It is intended to be used with the Installation Manual.

Temperature Changes & Expansion / Contraction

- ⑥ It is important to remember that ChamClad® materials will expand and contract with regular temperature changes. ChamClad® trims allow for any variance in panel lengths due to expansion/contraction.
- ⑥ When placing fasteners in the center of the designated nail slots, always leave a 1/32" (.8mm) gap between the fastener head and nail flange to allow ChamClad® panels expand/contract as needed. **Do not leave more than a 1/32" of a gap.**
- ⑥ The below guide provides expansion/contraction examples based on different panel lengths and temperature fluctuations.

Gap Reference Chart – Minimum End Gap per Side

Based on net temperature change (ΔT) gaps shown are minimum required clearances per side, per panel, assuming floating installation.

ΔT (°F)	ΔT (°C)	12 ft	16 ft	20 ft	30 ft*	35 ft*
18	10	1/16" (1 mm)	1/15" (2 mm)	1/12" (2 mm)	1/8" (3 mm)	1/7" (4 mm)
36	20	1/10" (3 mm)	2/15" (3 mm)	1/6" (4 mm)	1/4" (6 mm)	3/10" (7 mm)
54	30	2/13" (4 mm)	1/5" (5 mm)	1/4" (6 mm)	3/8" (10 mm)	7/16" (11 mm)
72	40	1/5" (5 mm)	4/15" (7 mm)	1/3" (9 mm)	1/2" (13 mm)	7/12" (15 mm)
90	50	1/4" (6 mm)	1/3" (9 mm)	5/12" (11 mm)	5/8" (16 mm)	11/15" (19 mm)
108	60	3/10" (8 mm)	2/5" (10 mm)	1/2" (13 mm)	3/4" (19 mm)	7/8" (22 mm)
126	70	5/14" (9 mm)	7/15" (12 mm)	7/12" (15 mm)	7/8" (22 mm)	1" (26 mm)
144	80	2/5" (10 mm)	7/13" (14 mm)	2/3" (17 mm)	1" (26 mm)	7/6" (30 mm)

*For panels 25 ft (7.6 m) and longer, values shown assume the panel is pinned at midpoint and required end gaps are calculated using half the total panel length.

Notes:

- ⑥ Gaps shown represent total expected panel movement divided equally at both ends (per side).
- ⑥ Temperature change (ΔT) is the difference between the installation and the highest anticipated temperature.

If further information or calculations are needed, please email engineering@chamclad.com

APPENDIX D - CARE AND MAINTENANCE

ChamClad® products are designed to be low maintenance, and our laminate films have exceptional properties that ensure ease of cleaning and surface longevity. They are highly ultra-violet, scratch, and salt air resistant. The film's low surface tension makes it inherently dirt-repellent and therefore easy to clean. ChamClad® finishes include anti-graffiti properties and, in most cases can be easily removed using a garden hose and mild kitchen detergent and warm water.

To preserve the lifespan of your ChamClad® product and maintain its warranty, regular cleaning and inspection are essential.

- ⑥ Minimum Cleaning Frequency: In normal or urban environments, we recommend cleaning your ChamClad® product every 12-18 months.
- ⑥ High-Exposure Areas: In areas subject to high pollutants, such as industrial or coastal environments, we recommend cleaning your ChamClad® product every 8-12 months.
- ⑥ Regular Inspections: Inspect the product frequently and promptly remove any debris or contaminants such as bird droppings. Prolonged contact with such materials may lead to staining, uneven wear, or surface damage.

Refer to the recommended maintenance guidelines below to ensure optimal care for your ChamClad® product.

General Cleaning:

- ⑥ You may clean the surface with a soft cloth, sponge or soft bristle brush and a neutral detergent. It is recommended to use ChamClad® Product Cleaner (supplied by ChamClad®) and/or a soap, or liquid cleaner (in non-concentrated form) such as Simple Green. Follow with a thorough rinsing of fresh water to ensure all cleaner has been removed.
- ⑥ If marking has occurred from board-to-board friction, you may clean it with a soft cloth soaked in water and soap. Allow the cloth to sit on the area for 60 seconds. Panels should be rinsed thoroughly with clean water.
- ⑥ To avoid streaking start at the top of the wall – working your way to the bottom.
- ⑥ You may pressure wash ChamClad® panels with a low PSI pressure washer. DO NOT exceed 1500 PSI.

DO NOT:

- ⑥ Do not use solvents when cleaning panels. Solvents may damage the protective layers in the film.
- ⑥ Do not wash panels with a pressure washer at close range.
- ⑥ Do not use abrasive, erosive, or caustic solvents to clean ChamClad® panels as they can dull and/or damage the panel finish and will void the warranty.

Should you experience removal difficulties, please contact us via email.

